


Ø 222x60mm



■ Dimensions Drawing

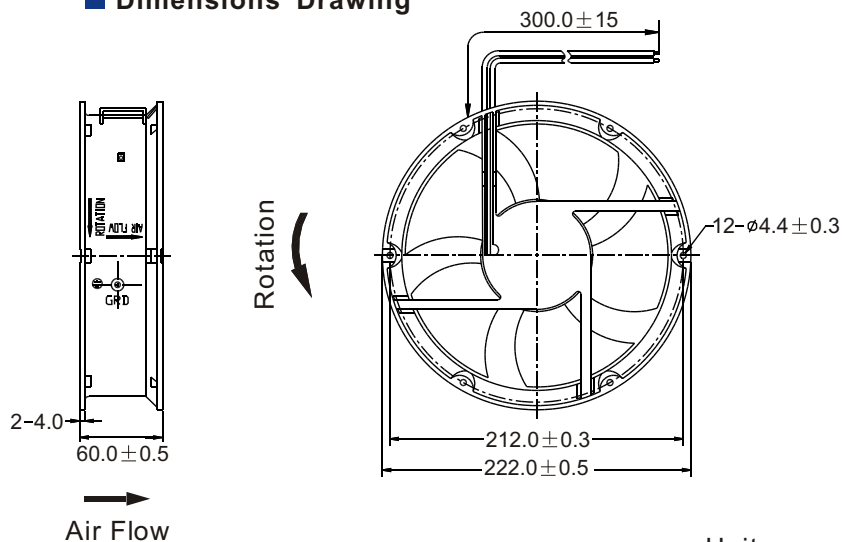


Unit: mm

General Specification:

- Frame : Aluminum Alloy
- Impeller : PA6 UL94V-0 Reinforced Plastic
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C ~ 70°C、
35% ~ 85%RH
- Storage Temperature : -40°C ~ 80°C、
35% ~ 85%RH

■ Performance Curves

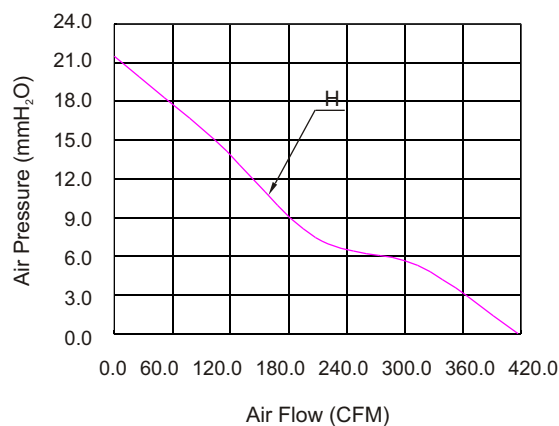

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	
RDH2260B4	Ball	48	24.0~55.2	1.20	2,800	416.8	21.5	62	•	•	•	•	1150