


Ø 254x89mm



#### General Specification:


- Frame : Aluminum Alloy
- Impeller : PA6 UL94V-0 Reinforced Plastic
- Lead Wires : UL Type  
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、  
35%~85%RH
- Storage Temperature : -40°C~80°C、  
35%~85%RH

#### Dimensions Drawing

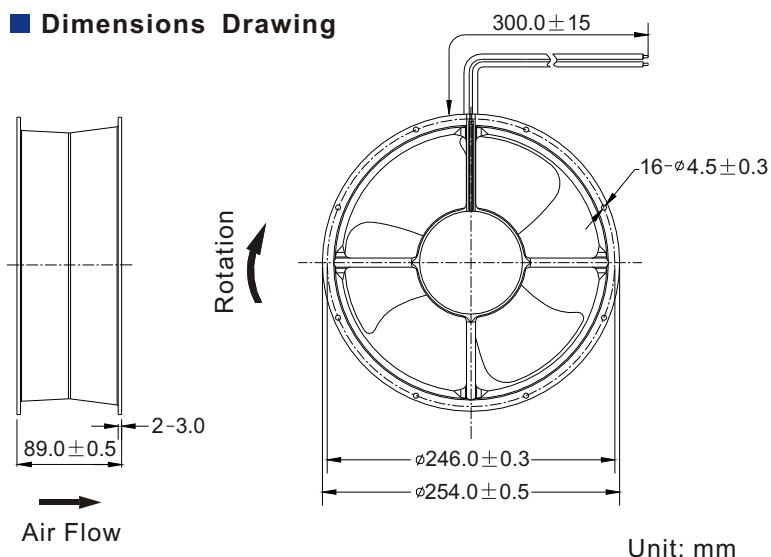

Unit: mm

#### Performance Curves

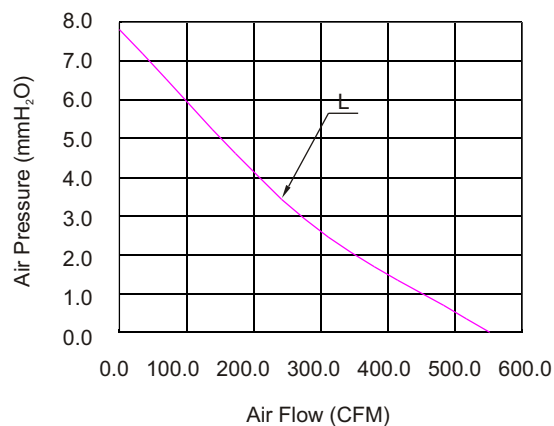

| Listed Model | Bearing System | Rated Voltage | Operation Voltage | Rated Current | Rated Speed | Air Flow | Air Pressure       | Noise Level | Available Features (Optional) |                   |                 |                        | Weight |
|--------------|----------------|---------------|-------------------|---------------|-------------|----------|--------------------|-------------|-------------------------------|-------------------|-----------------|------------------------|--------|
|              |                | VDC           | VDC               | A             | RPM         | CFM      | mmH <sub>2</sub> O | dBA         | Tachometer Output             | Rotation Detector | Thermal Control | Pulse Width Modulation | g      |
| RDL2589B4    | Ball           | 48            | 24.0~55.2         | 0.65          | 1,800       | 551.7    | 7.8                | 57          | •                             | •                 | •               | •                      | 1730   |