


∅ 252x90mm



General Specification:


- Frame : Aluminum Alloy
- Impeller : PA6 UL94V-0 Reinforced Plastic
- Lead Wires : UL Type
(+) : Red (-) : Black
- Operation Temperature : -10°C~70°C、
35%~85%RH
- Storage Temperature : -40°C~80°C、
35%~85%RH

■ Dimensions Drawing

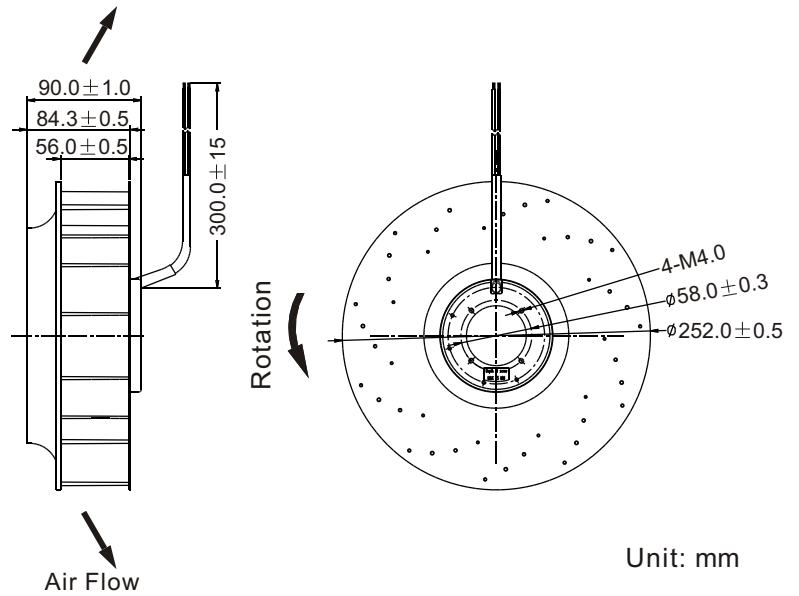

Unit: mm

■ Performance Curves

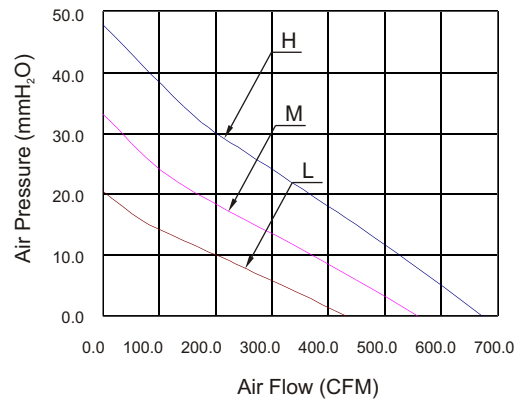

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RFH25290B4	Ball	48	24.0~55.2	3.50	2,400	673.5	47.9	70	•	•	•	•	1525
RFM25290B4			24.0~55.2	1.50	1,900	558.8	33.2	64	•	•	•	•	
RFL25290B4			24.0~55.2	1.00	1,600	432.3	20.5	60	•	•	•	•	
RFM25290B4		24	12.0~27.6	3.00	1,900	558.8	33.2	64	•	•	•	•	
RFL25290B4			12.0~27.6	2.20	1,600	432.3	20.5	60	•	•	•	•	

Notes: ©All readings are typical values at rated voltage.
©Specifications subjected to change without prior notice.