
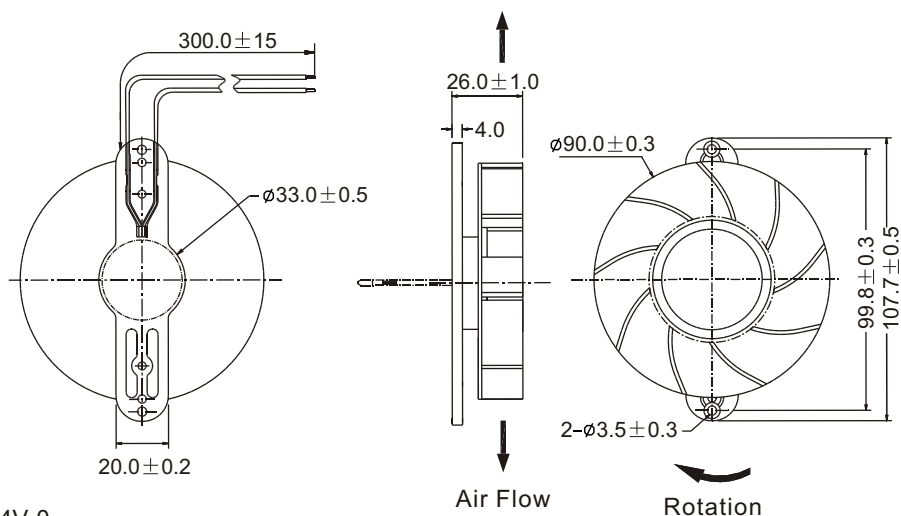


## ■ Dimensions Drawing

**General Specification:**

- Frame and Impeller : Thermal Plastic , UL 94V-0
- Lead Wires : UL Type  
(+) : Red (-) : Black
- Operation Temperature :  $-10^{\circ}\text{C} \sim 70^{\circ}\text{C}$  、  
 $35\% \sim 85\% \text{RH}$
- Storage Temperature :  $-40^{\circ}\text{C} \sim 80^{\circ}\text{C}$  、  
 $35\% \sim 85\% \text{RH}$

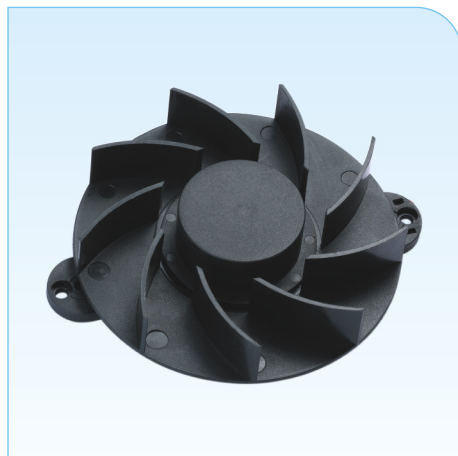

Listed Model	Bearing System	Rated Voltage	Operation Voltage	Rated Current	Rated Speed	Air Flow	Air Pressure	Noise Level	Available Features (Optional)				Weight
		VDC	VDC	A	RPM	CFM	mmH <sub>2</sub> O	dBA	Tachometer Output	Rotation Detector	Thermal Control	Pulse Width Modulation	g
RDH9025S APF	Sleeve	12	6.0~13.8	0.35	2,500	---	---	38	•	•			82
RDM9025S APF			6.0~13.8	0.25	2,100	---	---	31	•	•			
RDL9025S APF			6.0~13.8	0.20	1,800	---	---	27	•	•			
RDH9025S BPF			6.0~13.8	0.35	2,500	---	---	38	•	•			
RDM9025S BPF			6.0~13.8	0.25	2,100	---	---	31	•	•			
RDL9025S BPF			6.0~13.8	0.20	1,800	---	---	27	•	•			